


CBL | **Assembly
Instructions**

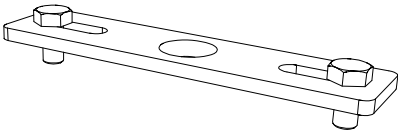

Introduction

Thank you for choosing a high-quality product “MADE IN GERMANY” from the brand TWAUDIÖ.

The cluster plate CBL is an accessory for the M6 and M8 loudspeaker.

It is characterized by a subtle look, a remarkable size to weight ratio and ease of use.

If you lend your product to another party, inform that party of the safety-related operating procedures and hand over this assembly guide. If you require additional copies of this manual, you can obtain them free of charge from TWAUDIÖ or download them from www.twaudio.de

Instructions in this user manual

Strictly adhere to the instructions contained in this operating manual that are marked as follows:



This symbol in combination with the signal word “Warning” identifies a potentially hazardous situation. Failure to comply with this safety instruction can lead to serious injury or even death.



This symbol in combination with the signal word “Caution” identifies a potentially hazardous situation. Failure to comply with this safety instruction can lead to light or moderate injury.



This symbol in combination with the signal word “Note” identifies a potentially hazardous situation. Failure to comply with this safety instruction can lead to product damage.



This symbol in combination with the signal word “Tip” identifies additional information or notes that will simplify working with TWAUDIÖ products on the basis of practical experience.

Notes on the products

**Read manual
before use!**

Before using the device, carefully read the assembly instructions and keep it with the CBL cluster plate.

General information

Assembly instructions: OM-CBL

Version 2.0 en, 05/2022

© by TWAMBO 2022; all rights reserved.

All information contained in this operating manual was correct to the best of our knowledge at the time of printing.

Quality warranties or assurance of suitability for a certain type of use based on the technical specifications, dimensions and weights are not granted by TWAMBO.

TWAMBO also shall not assume liability for any secondary damage (property damage and/or personal injury) nor for the failure to comply with this operating manual!

TWAMBO reserves the right to update this document based on recent developments.

TWAMBO GmbH
Karl-Hofer-Str. 42
14163 Berlin
Germany

Phone : + 49 (0) 71 41-48 89 89 0
Fax: + 49 (0) 71 41-48 89 89 99
E-Mail: info@twaudio.de
WWW: www.twaudio.de

Content

1. Safety Intended use	5
2. Overview	7
2.1 Components	7
3. Technical data	8
3.1 Data sheet	8
4. Commissioning.....	9
4.1 Setup	9
4.2 Needed tools for setup	9
4.3 Wind load	9
4.4 Assembly CBL to M6 loudspeaker on HSF	10
4.5 Assembly CBL to M6 or M8 loudspeaker on HSA.....	11
4.6 Assembly CBL to M6 or M8 loudspeakers at DHST.....	13
5. Transport and storage	14
6. CE Conformity Declaration.....	15
7. Disposal	15

1. Safety | Intended use

Please adhere to the following safety instructions to avoid risks when using accessories.

The CBL cluster plate was developed for use in professional sound systems. The cluster plate may only be used by trained and qualified personnel.

Note the operating modes described in this assembly instructions. Other uses are not permissible.

Damage caused by improper use is not covered by TWAMBO.



WARNING

Before every operation, check the scope of delivery of the CBL cluster plate for its completeness and ensure that all parts are in perfect condition.

The scope of delivery includes specified components. Only use the recommended and certified components.



WARNING

The CBL cluster plate may only used with the M6 or M8 loudspeaker.

This rigging manual describes how to use the CBL cluster plate correctly. Any other use shall be deemed improper and may result in damage or even injury.

Modifications or alterations to individual parts of the CBL cluster plate are not permitted! Danger to life!



CAUTION

The CBL cluster plate is designed both for indoor and outdoor use.



WARNING

The CBL cluster plate may only be used by trained and qualified personnel. Personnel must check the CBL cluster plate for suitability before each use.



WARNING

The CBL cluster plate must be taken out of operation immediately as soon as visible damage to the parts can be seen.



WARNING

Please keep all elements of the CBL cluster plate away from children! The small parts can easily be swallowed and lead to suffocation!



The payload of the CBL cluster plate is designed for two M6 or two M8 loudspeakers. Do not exceed this payload.



Before mounting the CBL cluster plate check that e.g. tripods and trusses are capable of carrying the payload of the components.



Make sure that no water pipes, electrical lines or any other lines are behind the intended place of mounting.



Only use wall plugs and screws which are suitable for the intended mounting and structural fabric. All screws must be set and tightened properly. Ensure that the fixing holes have the correct depth and diameter. Always use all fixing holes.



When moving (assembling, dismantling, maintaining) the CBL cluster plate with M6 or M8 loudspeakers, ensure sufficient space to prevent collisions with other objects.



Do not squeeze or twist the electrical cables of the M6 or M8 loudspeakers during the installation of the CBL cluster plate! The respective national electrotechnical rules and regulations are applicable.



All screw connections should be checked each time the CBL cluster plate are installed. Tighten all loose screws. If this is no longer possible, the screws must be replaced.

2. Overview

2.1 Components

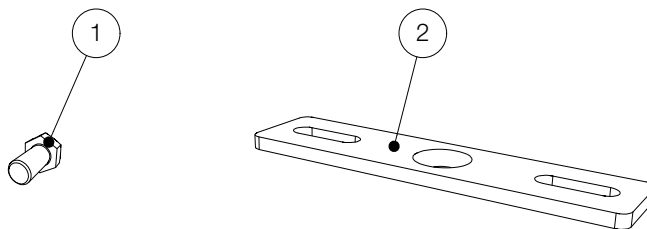


Figure 2.1 - Overview

- 1. Hexagon screw M10 x 20..... 2 pieces
- 2. Cluster plate CBL..... 1 piece

3. Technical data

3.1 Data sheet

Maximum load capacity	2x M6 or 2x M8
Dimensions (h x w x d)	42 x 180 x 6 mm [1.65 x 7.09 x 0,24 in]
Weight	0,4 kg [0.9 lbs]
Surface	Powder-coated

4. Commissioning

4.1 Setup

The CBL cluster plate is designed for the hanging and stacking operation. TWAUDIÖ provides a wide range of accessories to securely attach the swivel bracket.



Please note that setting up the system structures always requires two persons!



Make sure that all system structures are located on a firm, level surface and that the surface can bear the total weight!



TWAUDIÖ recommends using only the accessories specified by TWAUDIÖ for securing and mounting loudspeakers.

4.2 Needed tools for setup

Have the following tools ready for each setup:

- Open-end wrench SW17

4.3 Wind load



Before setting up the system outdoors, consider unexpected wind conditions at the operation site!

Disassemble your system immediately when wind speeds exceed 8 bft (34 to 40 kn / 62 to 74 kph / 38.5 to 46 mph) and secure the system components!

Make sure that there are no persons in the immediate vicinity of the system structure!



Make sure that the system structures are not operated over the audience at wind speeds in excess of 6 bft (22 to 27 kn / 39 to 49 kph / 24.2 to 30.45 mph) and that there are no persons in the immediate vicinity of the system structure!

4.4 Assembly CBL to M6 loudspeaker on HSF



Mount two M6 loudspeaker with CBL cluster plate and the HSF pole mount flange on the tripod. Make sure that you use suitable fastening material and that the connections are set firmly and correctly!

General safety instructions for setting up on a tripod:



For every system setup on a tripod, use a tripod that is designed according to the total weight.



When setting up a system on uneven surfaces, such as gravel or grass, always put a pressure-resistant surface under all four spindle feet! Make sure that all four spindle feet rest completely on the pressure-resistant shims and that the surface can withstand the total weight! Note that depending on the system design, either the front or rear spindle feet may be able to carry more weight!



Make sure that no one can trip over your system structures, or over individual components! This is especially true for all pressure-resistant shims, tripod legs and guy ropes!



Any influences on your system setup, such as leaning against objects (or people) and flying objects around, be refrained from!



Mount positions 1 and 2 (see figure 2.1) on top of the M6 loudspeakers as shown in figure 4.4.1 and 4.4.2.

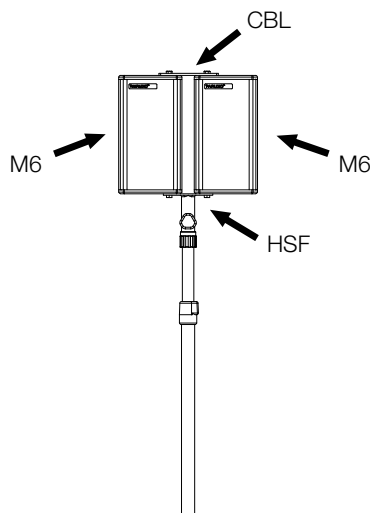


Figure 4.4.1 - Assembly CBL to M6 loudspeaker

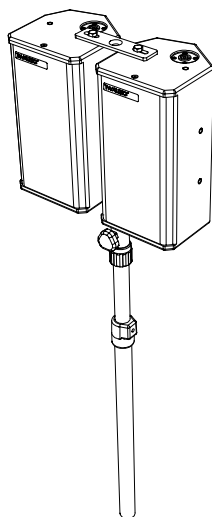


Figure 4.4.2 - Assembly CBL to M6 loudspeaker

4.5 Assembly CBL to M6 or M8 loudspeaker on HSA



Mount two M6 or two M8 loudspeaker with CBL cluster plate and the HSA pole mount adaptor on the tripod. Make sure that you use suitable fastening material and that the connections are set firmly and correctly!

General safety instructions for setting up on a tripod:



For every system setup on a tripod, use a tripod that is designed according to the total weight.



When setting up a system on uneven surfaces, such as gravel or grass, always put a pressure-resistant surface under all four spindle feet! Make sure that all four spindle feet rest completely on the pressure-resistant shims and that the surface can withstand the total weight! Note that depending on the system design, either the front or rear spindle feet may be able to carry more weight!



Make sure that no one can trip over your system structures, or over individual components! This is especially true for all pressure-resistant shims, tripod legs and guy ropes!



Any influences on your system setup, such as leaning against objects (or people) and flying objects around, be refrained from!



Mount positions 1 and 2 (see figure 2.1) on top and bottom of the M6 or M8 loudspeakers as shown in figure 4.5.1 and 4.5.2.

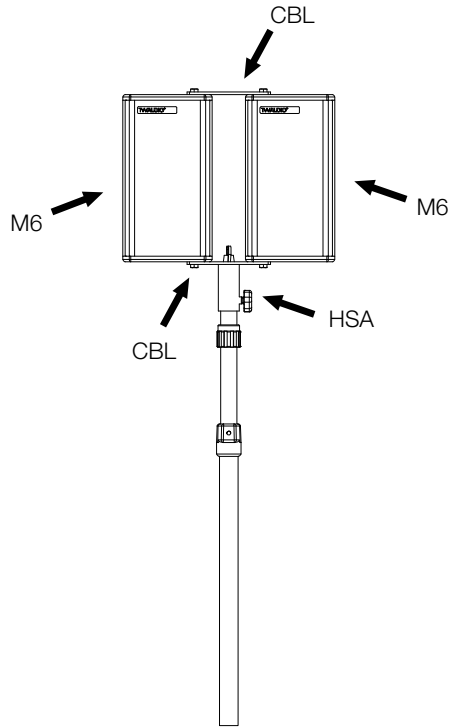


Figure 4.5.1 - Assembly CBL to M6 Lautsprecher on HSA

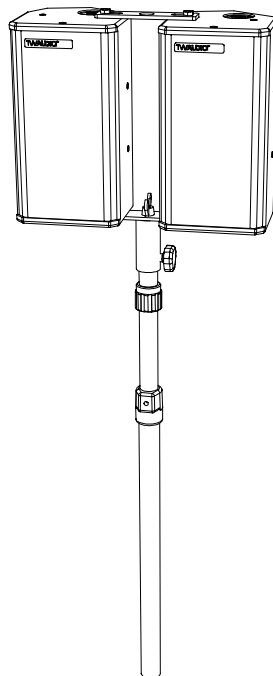


Figure 4.5.2 - Assembly CBL to M6 Lautsprecher on HSA

4.6 Assembly CBL to M6 or M8 loudspeakers at DHST



Attach the DHST Doughty Halfcoupler Slimline to the hole in the middle of the CBL cluster plate when using the CBL cluster plate on trusses. Make sure that the connections are set firmly and correctly!



Mount positions 1 and 2 (see figure 2.1) on top and bottom of the M6 or M8 loudspeakers as shown in figure 4.6.1 and 4.6.2.

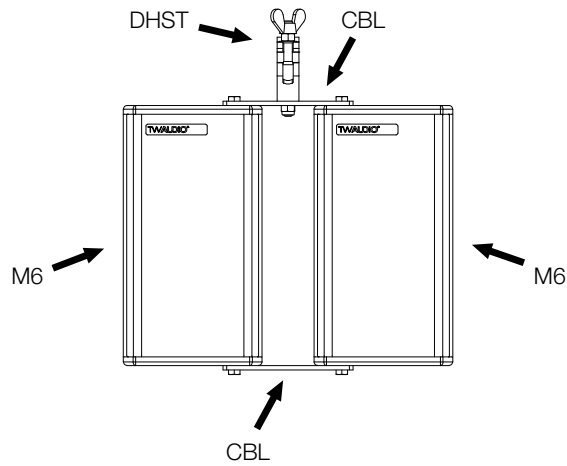


Figure 4.6.1 - Assembly CBL to M6 loudspeaker at DHST

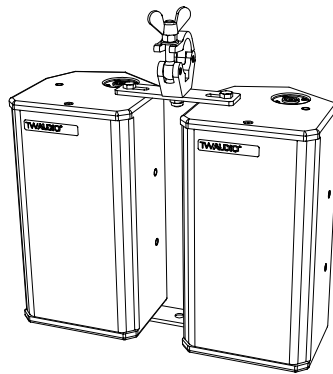


Figure 4.6.2 - Assembly CBL to M6 loudspeaker at DHST

5. Transport and storage



When transporting and storing the unit, it is important to ensure that the surface of the swivel bracket are not damaged. Moisture can penetrate where steel surfaces are exposed by scratches and result in corrosion.

In addition, appreciable dust deposits may considerably impair the functionality of a loudspeaker membrane. For this reason, the loudspeakers should be transported and stored in a safe, careful, dry and largely dust-free manner.

The following accessory parts for the swivel bracket are available from TWAUDIÖ:

- Hexagon screw M10 x 20
- HSF (pole mount flange)
- DHST (doughty halfcoupler slimline)
- HSA (pole mount adaptor)

The original packaging is unsuitable as permanent storage and transport packaging.

6. CE Conformity Declaration

Copy and translation of the original CE Conformity Declaration:



We hereby declare that the below-referenced components by virtue of their design and construction, and in the configuration placed on the market by us, satisfy the safety and health requirements of the applicable EC directives. This declaration becomes invalid in case of modifications that have not been approved by us.

Diese Erklärung betrifft folgende Komponenten

- CBL

as well as all model variants based on these, provided that they correspond to the original factory models and have not been technically modified in any way.

Applicable directives:

- 2001/95/EG

Applicable national standards and technical specifications:

- DIN EN 18800
- DIN EN ISO 12100
- DGUV Vorschrift 17 und 18

Berlin, Germany, January 1st, 2021


Bernhard Wüstner

7. Disposal

If you have any question regarding the disposal of used devices, please contact us under the following telephone number:

+49 (0) 71 41 - 48 89 89 0

In countries outside of the European Union, comply with local regulations.

TWAMBO GmbH
Karl-Hofer-Str. 42
14163 Berlin
Germany

Phone: + 49 (0) 71 41-48 89 89 0
Fax: + 49 (0) 71 41-48 89 89 99
E-Mail: info@twaudio.de
WWW: www.twaudio.de