


The VERA S32, a compact, flyable subwoofer belonging to the VERA20 series, equipped with an 18" driver in the front and a 14" driver at the rear. Both long throw high-performance chassis are perfectly aligned and due to the various operating modes, it offers a highly flexible system that is convincing in any given acoustical situation.

The cardioid mode is optimised for maximum attenuation of the rearward sound dispersion, achieving attenuation greater than 15 dB over the entire bass spectrum. The end-fire mode is optimised for maximum sound pressure at the front with a simultaneous partial reduction at the rear.

The advantages are obvious: Because of their directionality, the subs sound much more concrete and musical, especially in venues with a lot of reverb. The players on the stage, as well as possible neighbours behind the stage are spared of the effects of excessive bass levels.

The VERA S32 remained a compact subwoofer. With its 60 cm (23.6 in) system width and the integrated rigging hardware, the sub can perfectly be integrated into a VERA20 array. Due to its coherent phase response it also offers a plug'n'play option with all TW AUDiO tops and subs, becoming an economical audiophile extension.

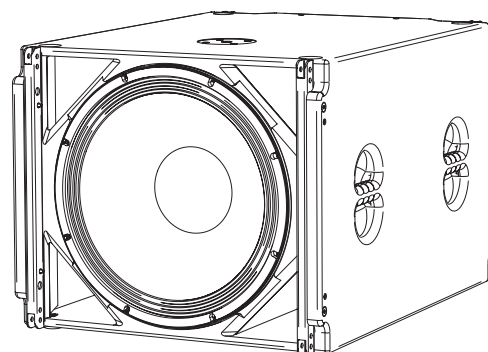

Key Features


- » Two aligned chassis, (18" front / 14" rear) for cardioid and end-fire mode from one enclosure.
- » > 15 dB noise reduction at the rear of the subwoofer in cardioid mode.
- » 134 dB SPLmax (end-fire mode), 2400 W (front) / 1400 W (rear) program power capacity.
- » Integrated rigging system for VERA20 arrays.
- » Pole mount for use of top on pole.
- » Coherent phase response with all TW AUDiO products.
- » Operation with dedicated TW AUDiO presets on Lab.gruppen or Powersoft series.

TW AUDiO GmbH
 Osterholzallee 140-1
 71636 Ludwigsburg
 Germany

Tel.: +49 7141 488989-0
 Fax: +49 7141 488989-99
 Mail: info@twaudio.com

Technical Data


Drivers	1 x 18" LF (front) 1 x 14" LF (rear)
Frequency range	38 - 120 Hz
Power capacity program/peak	2400/4800 W (front) 1400/2800 W (rear)
Impedance	8 Ω (front) 8 Ω (rear)
Coverage	cardioid/hypercardioid
Sensitivity 1 W / 1 m	99 dB
SPL max / 1 m	134 dB
Connection	speakON™ NL4 2± (front) 1± (rear)
Dimensions (H x W x D)	506x600x800 mm 19.9x23.6x31.5"
Weight	54.2 kg 119.5 lbs
Finish	polyurea coating
Accessories	RF600, BLS, ORF900, QDB18, Cover2S32

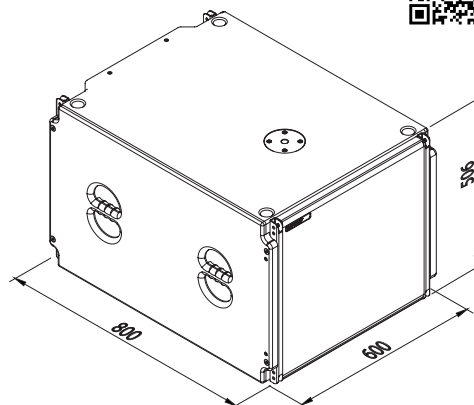

System Proposals


3 AMPLIFIER CHANNELS

1 x SBT20
 1 x HSF
 1 x DISST
 1 x T20
 1 x S32

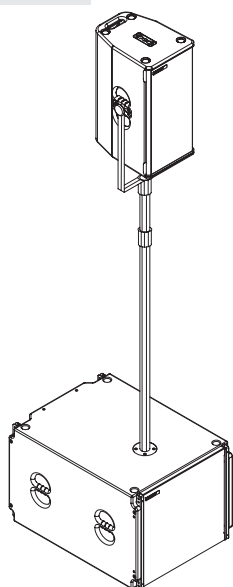


3 AMPLIFIER CHANNELS

1 x LA900
 2 x RF600
 3 x VERA20
 2 x S32

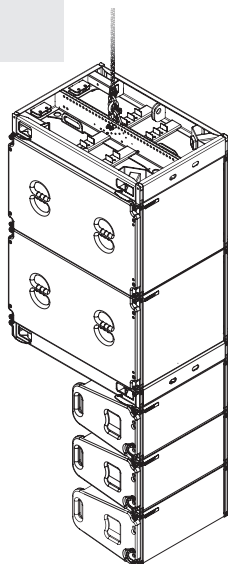

RF600 STANDARD

1 x LA900
 1 x RF600
 Up to 12 x S32

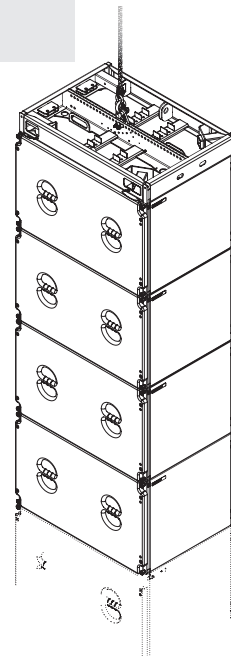

PRESETS AVAILABLE FOR

Powersoft
 AUDIO
LAB.GRUPPEN